



www.s-art.pro

Print this file on A4 paper without changing the scale - this is very important!

Place the tensioned thread between the printed lines.


The light should come from above, avoid the shadow from the thread.

Move the thread until you visually determine its thickness.

0,40 mm



0,20 mm

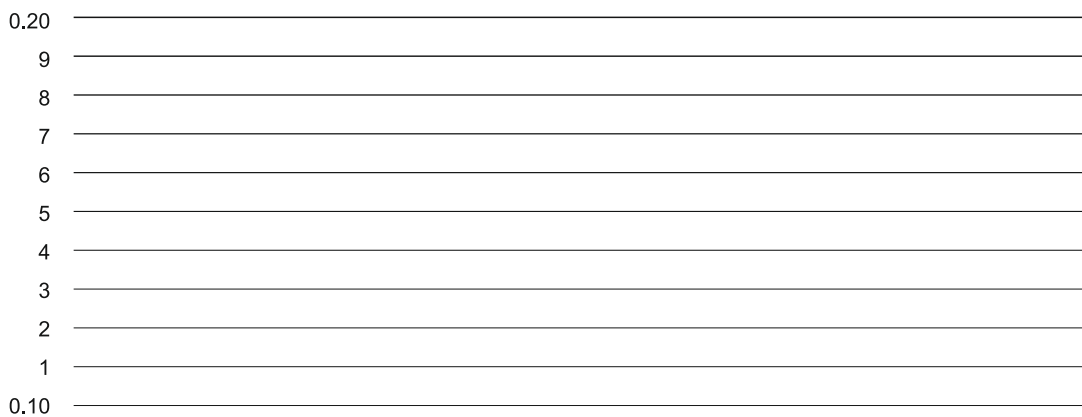

0,10 mm



0,05 mm

Tips.

On a frame measuring 40-50 cm with a number of iterations of about 2700-3300, the best result you can be obtained with monofilament with a thickness of 0.11-0.13 mm

On frames 60-80 cm, you can use cotton, acrylic or silk thread 0.2-0.4 mm thick.

It is better not to use Lurix and other iridescent threads - shine only hurts.

This is only a general advice - in each case everything is individual and I cannot give guarantees and an exact recommendation.